

PrimaLuna® DiaLogue One

Herman van den Dungen: **PrimaLuna** ▶ in Italian language is "**First Moon**". My grandfather was the first "**Herman**". My grandmother, an aristocratic lady in a small Dutch village, had a special name for her husband: "**Maantje**", which means **Little Moon** (which is now also the name of our small dog), **van den Dungen**. The people in the village adopted that name, and having a strong accent, they soon called him "**Maontje**" van den Dungen. My father's first name was Cor, but in the village it was of course "**Cor from Maontje van den Dungen**". I was of course "**Herman from Cor from Maontje van den Dungen**" etc. That's why I thought of **First Moon** as a brandname and that's why the logo is how it is ◀

Loris Arrigucci: **PrimaLuna** ▶ believe it or not ... I discovered a small town located 50Km north of Milano called **Primaluna!!!** Please get yourself a map from Italy. You'll find **Primaluna** town near the upper-right corner. It is located 50Km north of Milano near the Lake of Como. This should eliminate every doubt regarding "italian" origin of **Primaluna** name. I've read the "history" section of the **Primaluna** village web site and found the following (literally translated):

One probable interpretation of the name of the village comes from latin "**Primum Lumen**", which means "**First Light**" of Christianity, since the very first evidence of Christianity in this region dates 495 Annus Domini. "**First Light**" translates into "**Prima Luce**" in Italian and this seems very interesting to me: **PrimaLuce (FirstLight)** is the first light that we, hi-fi lovers with small budgets, can see in this world of darkness populated by way too expensive esoteric gears ◀



Please contact us for registering your PrimaLuna DiaLogue One amplifier. We will keep you updated of upgrades or any other information related to your amplifier. If you wish to comment on your PrimaLuna DiaLogue One amplifier, please do. If you want to send us a review of your experience with the amplifier, you are more than welcome to. If you have any technical questions, please don't hesitate to contact us. We thank you upfront for your time and attention.

Local distribution:

Worldwide distribution:
Durob Audio BV
P.O. Box 109
5250 AC Vlijmen
The Netherlands

Email: primaluna@primaluna.nl
Website: www.primaluna.nl

PrimaLuna® DiaLogue One

PrimaLuna®

DiaLogue One

Integrated Amplifier



Serialnumber

Table Of Contents

Thank You	3
Specifications	4
Warning - Package Contents - Initial Setup	5
Inputs, Controls & Remote Function	6
Remote Control	7
Ultralinear - Triode Switching	8
Stereo Home Theater Pass Thru	9
Adaptive AutoBias™ - PhonoLogue MM Option	10
Tube Basics	11
Fuse Protection	12
Troubleshooting	13
User Notes	14
Warranty Information	15

Warranty Information

Two-year limited warranty

Six-month warranty on stock vacuum tubes

Terms & Conditions

- 1. Limited to original purchaser.** This warranty is for the sole benefit of the original purchaser of the covered product, and may not be transferred to a subsequent owner.
- 2. Conditions & Limitations.** This warranty is subject to conditions and limitations, as follows. This warranty is void and inapplicable if the product has not been used in accordance with the instructions found elsewhere in this manual, or if it has been misused, abused, damaged by accident or neglect, or in transport once in possession of purchaser. The warranty is also void if the product has been tampered with or has been repaired or modified by anyone other than Durob Audio BV or its specifically authorized representatives.
- 3. Remedy.** If this product contains material, manufacturing, or workmanship defects, it must be packed in original packaging and returned to Durob Audio BV or its authorized representative via insured freight, at the owner's expense. Returned products must be accompanied by written description of the defect, and a return authorization number (available from Durob Audio BV or the authorized representative via e-mail). Upon receipt of the defective product, Durob Audio BV or the authorized representative agrees to repair the product without charge for parts (except vacuum tubes if the unit is more than 6 months old), or labor. The product will then be returned via prepaid, insured freight, with carrier at the sole determination of Durob Audio BV or the authorized representative. This constitutes the purchaser's sole remedy.
- 4. Design change.** Durob Audio BV and its partners reserve the right to modify their products or change specifications at any time without obligation or liability to previous purchasers.
- 5. Miscellaneous.** Any implied warranties relating to the above product shall be limited to duration of this warranty. This warranty does not extend to any incidental or consequential costs or damages to purchaser or third-parties. Our liability will be no more than the amount you paid for the product that is the subject of a claim. This is the maximum amount for which we are responsible. This warranty gives you specific legal rights. You may also have other rights which vary from country to country and state to state.

Copyright Durob Audio BV - 2010. All rights reserved.
Reproduction in whole or part of text, logo, graphics or schematics is strictly forbidden
without permission, in writing, of Durob Audio BV

The information in this manual is subject to change without further notice.

User Notes

THANK YOU!

We would like to thank you for choosing our PrimaLuna DiaLogue One vacuum tube integrated amplifier as the heart of your music system. The DiaLogue One is the first member of the next level up of our family of affordable, high-quality tube products. The designers and builders of the PrimaLuna equipment all have a long history in high-end audio. We feel that it's time to offer a range of affordable audio instruments that can easily compete with today's most expensive brands.

We firmly believe that our quality level will be a difficult standard for other products in the market to match.

This PrimaLuna DiaLogue amp features:

- Hand-made construction with the finest point-to-point wiring, using workmanship that is equal to or better than any product you can buy at any price.
- A heavy gauge steel, fully vented chassis with a five coat finish. Each coat is hand-rubbed and polished.
- Premium parts: toroidal transformer for power supply; custom designed -in conjunction with one of the most prestigious transformer designers in the USA- encapsulated output transformers for lowest hum; wide bandwidth for great bass and extended highs; ceramic tube sockets; ALPS volume control; Nichicon and Realcap capacitors; gold-plated heavy duty WBT style speaker terminals; gold-plated panel mounted input jacks.
- SoftStart™ circuit for extended life of sensitive components, plus a reduced chance of tube failure from thermal shock.
- Adaptive AutoBias™ exclusive to PrimaLuna. This circuit monitors and smoothly adjusts bias constantly and instantly, reducing maintenance and increasing performance due to the dramatic reduction in distortion.
- Tube plate fuse to protect the amp output stage. Other amplifiers might need a trip to the shop if a tube fails; not this one- just plug in a new tube, fuse, and go.
- Ultralinear or Triode mode switchable by remote control
- 5 line level inputs, 1 Stereo Home Theater Pass Thru
- 1 tape out
- Heavy metal system remote control included

Premium tubes are available from us and other parties if you wish to upgrade. In USA, Upscale Audio's inventory of New Old Stock tubes is the largest you can find. Elsewhere, independent suppliers can assist you to make your best choice.

We hope that the PrimaLuna DiaLogue One amplifier will make you want to follow our next steps in expanding this new range of products. If you have any questions or comments, don't hesitate to contact us. You can also share your thoughts with others at www.audioreview.com or other review sites. On the www.primaluna.nl website you will find links to these and other websites. Our prices are kept low by using word-of-mouth and customer feedback, and we would appreciate hearing what you have to say about our product. If you need service during or after the warranty period, contact us.

Thanks again for your support!

Herman van den Dungen
DUROB AUDIO BV

Specifications

Power Ultralinear	36 Watts per channel
Power Triode	18 Watts per channel
Frequency Response	10Hz - 30 kHz +/- 1 dB
THD with AAB	< 0,3% @ 1W; less than 1,2% at rated power
S/N Ratio	89 dB
Input Impedance	100 kOhm
Input Sensitivity	240 mV (for rated power at maximum volume setting)
Maximum Gain	36,5 dB
Power Consumption	248 Watts
Net Weight	63.8 lbs / 29 kg
Shipping Weight	70.5 lbs / 32 kg
Dimensions	15.9" x 15.2" x 8.3" / 405 mm x 385 mm x 210 mm (L x W x H)
Shipping Dimensions	22.7" x 18.4" x 12" / 577 mm x 468 mm x 305 mm (L x W x H)
Inputs	5 pairs Stereo RCA, 1 pair Home Theater Input
Outputs	1 pair Stereo RCA Tape, 4 & 8 Ohm Speaker Taps
Tube Complement	4 x EL-34 2 x 12AX7 2 x 12AU7
Remote control	Heavy Metal System Remote Control

All PrimaLuna products come with PrimaLuna SilverLabel tubes which are pre-selected by us following our simple 60 out of 100 rule (PTS™ - Premium Tube Selection) and as such, are already "special" when compared to other standard tubes on the market. Additionally, for certain models we have our GoldLabel tubes, which are available from us if you wish to upgrade.

As of July 1, 2006 all PrimaLuna products are manufactured with RoHS compliant parts.

Troubleshooting

Some tips:

- No output. Power is on, but power LED is off and tubes do not light up. Mains fuse is out. Replace fuse as per instructions on page 12.
- No output. Power LED is on and tubes do light up normally. Plate fuse may be out. Replace fuse as per instructions on page 12. If the new fuse goes out immediately after replacement, contact us for further assistance.
- Noise coming from one channel. Noisy tube. First swap the 12AX7 tubes left to right. If noise follows tube swap, then you have found the problem tube. If noise does not follow, swap the 12AU7 tubes left to right.
- Hum coming from one channel. Possible bad output tube. Swap the EL-34 tubes in pairs from right to left. If hum follows the swap, swap the far left and far right tubes. If the hum returns to the original problem channel, you have found the problem tube. If not, swap the inside EL-34 tubes left to right.
- Noise/distortion coming from both channels. Tubes may be in need of replacement. Read page 11 for tube basics and replacement options.
- Remote control does not function. Check batteries and if necessary, replace with new.

If you try these possible solutions and problems persist, contact us or your local distributor for further investigation.

Fuse Protection



A note on fuses: If "someone who knows" tells you to wrap fuses with aluminium foil to avoid wasting money on new ones, it's best not to take his advice. Fuses are safety valves. They should always be replaced with the exact same value and type.

Warning: Never attempt to check or replace a fuse while the amp is plugged in. Turn it off and unplug all speakers, components and AC cords before continuing. Wait 10 minutes to let tubes cool down and the circuit to fully discharge.

Plate Fuse:

The plate fuse is located inside the amp, on top of the Adaptive AutoBias™ board. To replace it, remove the bottom plate using a Phillips #2-type of screwdriver. The fuse is located in a small plastic case on the end of the Adaptive AutoBias™ board. Refer to the pictures on this page. Remove the top cover. The fuse will be held on by the cover. Remove it by twisting the fuse out of the holder.

Replace with a Littelfuse® 218 Series 250mA Slo-Blo® 5 x 20 mm fuse. The cover will snap back into place. Re-install bottom plate of the amp.

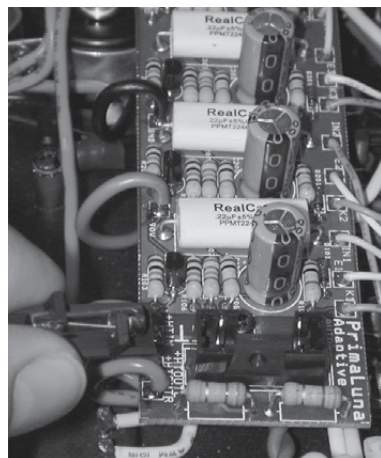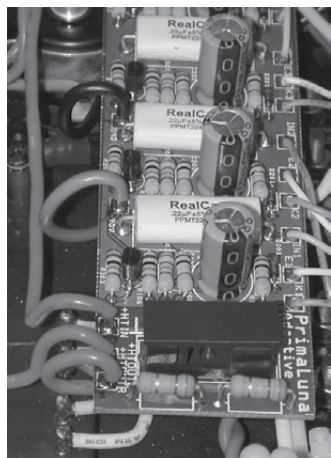

Mains Fuse:

The mains fuse is located on the rear of the amplifier, just below the power cord socket (see picture on this page). The fuse rating is 1 x Littelfuse® 213 Series 1A Slo-Blo® 5 x 20 mm fuse for 100-120VAC and Littelfuse® 213 Series 0.5A Slo-Blo® 5 x 20 mm fuse for 200-240VAC. Replace with the same type and value fuse! The fuse holder can be snapped out using a small slotted flat blade screwdriver.

Warning

To prevent serious injury, electrical shock or fire:

- Do not operate with bottom plate removed.
- Keep away from rain and moisture.
- Always disconnect all cable connections to and from amplifier before changing fuses and/or tubes.
- Do not replace fuses with any fuse other than the same type and rating as used by the factory.
- Do not replace tubes without reading instructions.
- Do not replace fuses or tubes if you have any doubt about your ability to do so. We accept no responsibility for any personal or material damage due to incompetent use or users.

Package Contents


DiaLogue One Integrated Amplifier	1
Power Cord	1
This Owner's Manual	1
White Gloves	1 pair
Tube Complement	4 x EL-34 2 x 12AX7 2 x 12AU7
Main Fuse	1 x Littelfuse® 213 Series 1A Slo-Blo® 5 x 20 mm fuse for 100-120VAC and Littelfuse® 213 Series 0.5A Slo-Blo® 5 x 20 mm fuse for 200-240VAC
Plate Fuse	1 x Littelfuse® 218 Series 250mA Slo-Blo® 5 x 20 mm fuse
Heavy Metal System Remote Control	1

Initial Setup

- Carefully remove the DiaLogue One from its packaging. Use the white gloves to prevent fingerprint smudges.
- Remove the tube cage by carefully pulling it up and away from the amplifier.
- Remove the protective foam surrounding the tubes.
- Tubes are already installed. Check that each tube is firmly seated in its socket. Use gloves.
- Replace cage back in its place if desired.
- Check to see the power switch is off (down).
- Connect each source to the corresponding plugs.
- Connect your speaker wires, positive to positive, negative to negative. This unit is non-inverting.
- Plug the powercord into the amplifier, then into the wall socket.
- Switch the amplifier on.
- The tubes will be warmed up and ready to use in about 30 seconds.


PrimaLuna® DiaLogue One

Inputs, Controls & Remote Function Front Panel

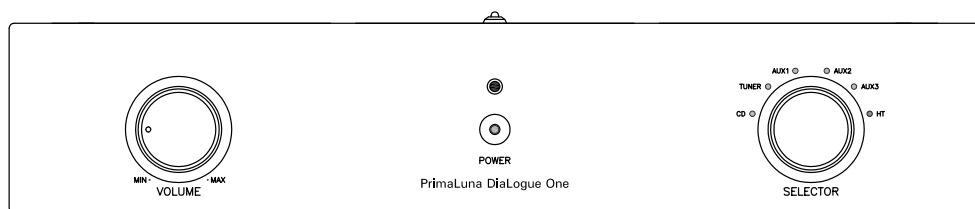

The front panel of the PrimaLuna models is made from machined aluminium, finished to match the blue metallic chassis. The volume is controlled with the knob on the left, source selection is on the right. Both volume and source can also be selected by remote control. Your sources are labelled CD, Tuner, Aux 1, Aux 2, Aux 3 (no functional differences between these) and HT (Pass Thru; volume fixed!!). The heavy metal system remote control that comes with your PrimaLuna DiaLogue One integrated amplifier can be used for selecting sources and adjusting volume and select Triode/UL mode. Also functions for -future- PrimaLuna cd-players are available. The power switch is located on the left side of the amp, just behind the front plate.

Rear Panel

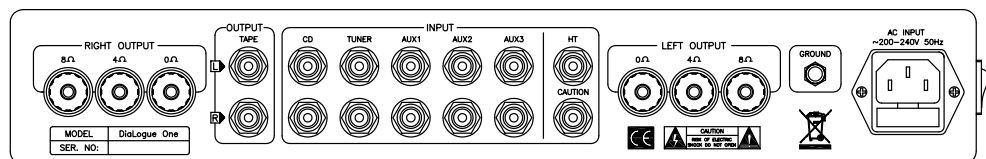

Looking at the rear panel, you will note you have 5 pairs of stereo inputs, 1 pair of HT Pass Thru, 1 pair of tape outputs, 1 x ground connection (for optional phono) and the pair of speaker terminals. Attach the positive (+) from your loudspeaker to the 4 or 8 ohm terminal that most closely matches the average impedance of your loudspeakers according to their manufacturer's specifications. The negative (-) from your loudspeaker attaches to the 0 Ohm terminal.

Tip: Experiment using the 4 or 8 Ohm positive (+) terminal to find the best match for your speakers. Do not make any assumptions. Trust your ears.

PrimaLuna® DiaLogue One

Tube Basics

The 12AX7 and 12AU7 tubes will have a life of about 5,000 to 10,000 hours. The lives of power tubes are more difficult to predict. This also depends on how "gently" or "roughly" you use your amplifier. In general -under normal conditions- you can say between 2,000 and 3,000 hours.

Here are some tips on using tubes:


- Do not use treatments on tube pins or in sockets.
- If you decide to experiment with other tube types, it's best not to swap tubes in and out repeatedly, as you never want to cycle amplifiers on and off rapidly. They should be left off for at least five minutes. Further, every time you insert a tube, you stand a chance of loosening the tube sockets. It's okay to have fun, and we support that, but don't go crazy and swap tubes in and out twenty times in a day.
- Do not leave the amplifier on 24 hours a day. Just a short warm-up is required for the PrimaLuna to get into its groove.
- Break-in yields improvements. Every tube, when new, needs to be left alone for a little while. So, when your amplifier is new, or when you re-tube it, it may take a little time to settle in. There is however no fixed "time rule" for break-in.
- Please note that tubes can vary electrically, and by plugging in the wrong type of tube (i.e. 6922 for a 12AX7) you can damage the amplifier and void your warranty.

Common Replacements:

- **12AX7:** ECC83, ECC803S, E83CC, 7025, CV4004. You can also use a 5751, but please note that the 5751 is a lower gain tube than a 12AX7 and the sound will be altered.
- **12AU7:** ECC82, ECC802S, E82CC, 5814, 6189, CV4003
- **EL-34:** 6CA7, E34LS, E34L. You may also use 6L6GC, 7581A and KT66 though power will drop slightly.



Topview picture of DiaLogue One




Some tubes and tube sockets have a "center key" which must correspond! If you use "brute" force and misalign, you will damage important and expensive parts of your amplifier!!

PrimaLuna® DiaLogue One

Adaptive AutoBias™

Exclusive to PrimaLuna, this circuit monitors and smoothly adjusts bias constantly and instantly. The genius of this design is that the Adaptive AutoBias™ actually improves the overall sound quality and performance of the amp. Between 12 and 30 Watts, measured distortion levels drop by over 40%. In addition, tubes do not have to be matched, and there is no bias (re-)adjustments needed, ever. Furthermore, the PrimaLuna is equipped with Soft-start™, which brings the amplifier on line slowly to prolong the life of internal components, including the tubes. This makes the PrimaLuna a joy to own and operate.

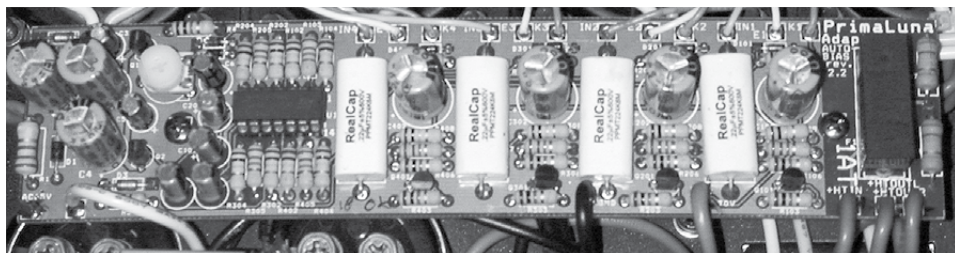


While matched tubes are not a requirement, it is still recommended if you want to get the very best results. You can get the very best in replacement tubes as well as rare vintage NOS (New Old Stock) tubes from us and other parties if you wish to upgrade. In the USA, Upscale Audio's inventory of New Old Stock tubes is the largest you can find. Elsewhere, independent suppliers can assist you to make your best choice.

PhonoLogue Phono Stage (Optional)

Your DiaLogue One integrated amplifier comes without a phono stage, but we have a high quality optional internal phono stage available. The PhonoLogue phono stage can be installed at any time by your dealer or any qualified person.

The PhonoLogue MM phono stage with RIAA equalization, requires no extra plugs or connectors. It fits (by soldering) on the existing RCA's of one of the inputs. It provides superior sound quality on a tiny footprint. We use Surface Mount Technology implementation for shortest signal paths as well as minimum parasitic capacitances and inductances. Excellent parts throughout, selected on sound quality as first priority: miniature film capacitors, minimelf resistors, superior opamp for highest accuracy, lowest noise, highest speed and most robust drive capabilities into the RIAA correction stage, resulting in a very detailed, open and lifelike sound from any LP record. Low impedance electrolytics, super low-noise powersupply. Dimensions: small as a big stamp!




Specifications:

Input Impedance:	50 kOhm
Gain:	42dB (127x)
Frequency Response:	10Hz - 50kHz
RIAA accuracy:	<0,5B 20Hz - 20kHz
Overload Margin:	>20dB rel 5mV
Harmonic Distortion & noise:	-83dB
Size:	3,2 x 3,8 cm (1.26" x 1.5")

PrimaLuna® DiaLogue One

Remote Control

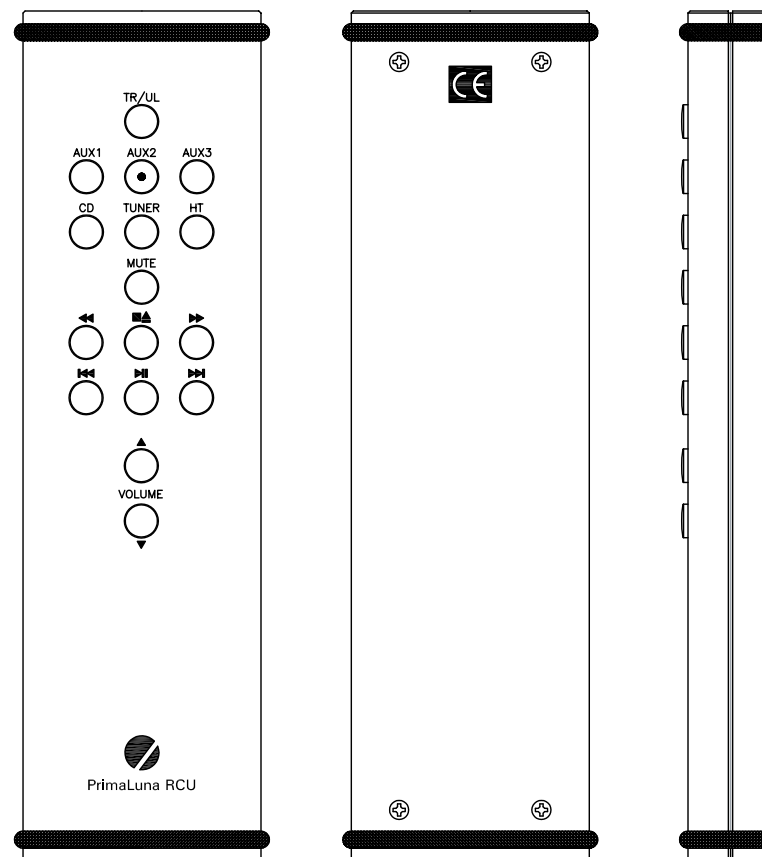

The functions of the PrimaLuna DiaLogue Remote Control are self-explanatory. The remote controls source selection, Triode/Ultralinear switching, volume & mute functions. The DiaLogue remote will also control the basic functions of the PrimaLuna ProLogue 8 CD Player.

The PrimaLuna DiaLogue Remote Control has two high quality silicon rubber rings on each end to protect against damage of the remote control itself as well as your furniture. These rings can be easily removed in case batteries have to be replaced or if you plain just don't like them.

In the event your remote control does not function, please check batteries and if necessary, replace with new (1.5V AAA-size). To access the battery-compartment, remove the rubber rings and unscrew the back plate. If the remote still does not function, contact your dealer for further assistance.

Ultralinear – Triode Switching

Your DiaLogue One integrated amplifier affords you the opportunity of switching between Ultralinear and Triode modes by remote control. You need not turn off the amp to do so; you can switch while the unit is operating. Although a faint click might be heard through your speakers, it is in no way harmful.

Your DiaLogue One always starts in Ultralinear mode when powered up. Centered behind the front panel is a two-color LED which indicates the mode in which the amp is functioning: Red—Ultralinear; Green—Triode.

The choice between Ultralinear or Triode modes is a matter of taste, influenced by your speakers and the recording.

Ultralinear Mode

The term ultralinear applies quite literally here. The design exerts a tighter grip on the speakers and produces music more likely to be described as accurate, dynamic, with great inner detail. The top and bottom end take on more “pop” and excitement.

Triode Mode

Take your KT-88 or EL-34 and wire it like a 300B! Triode sound is best described as warmer on top and bottom, a little compressed, with the midband now slightly more pronounced. Your shoulders drop as the sound is more relaxed. In absolute terms it will not play as loud as maximum power drops by roughly half compared to Ultralinear.

So Which Is Better?

Decide with your ears but we will leave you with this thought: On the surface it would appear that if you wanted to play music louder, you would use the higher-powered Ultralinear mode; conversely, you would use the Triode setting for soft listening. Not always true! At low listening levels, you may need the “pop” that Ultralinear provides for top and bottom extension so the music sounds full. At higher listening levels, Triode operation will start to “compress” and allow you to crank it up more with less fatigue. The point is: have fun with it and never let people tell you what sounds right.

Stereo Home Theater Pass Thru

The PrimaLuna DiaLogue One is equipped with a home theater pass thru that allows you to enjoy your stereo source material and the 2 main channels of your separate home theater processor.

This is a true pass-thru circuit. Most integrated amps that advertise having home theater pass thru circuits are only “unity gain” circuits. This means the volume is set at a pre-determined level, but the preamp section is still active and can introduce unwanted noise and coloration to the sound. The home theater pass thru of the DiaLogue One completely removes the preamp section from the signal path. This is a “direct-line” circuit that results in a lower noise floor, and less coloration.

Connecting Your Surround Sound Component To The DiaLogue One

To avoid damaging your equipment, always make sure everything is turned off and unplugged from the wall before connecting your components.

Connect your stereo sources & speakers to the DiaLogue One as normal. To integrate the DiaLogue One into your home theater system, take the front left & right preamp outputs from your A/V processor or receiver and plug them into the “HT” input on the back of the DiaLogue One. When you want to watch a movie, simply turn the DiaLogue One on, and switch the input to “HT.” Now control the volume via your home theater processor as normal. We recommend you go into the setup menu of your processor to match the levels of the front Left & Right speakers to match the volume of your center channel. Consult your processor’s manual for more information.