

## PrimaLuna® ProLogue Three

Herman van den Dungen: **PrimaLuna** ▶ in Italian language is "**First Moon**". My grandfather was the first "**Herman**". My grandmother, an aristocratic lady in a small Dutch village, had a special name for her husband: "**Maantje**", which means **Little Moon** (which is now also the name of our small dog), **van den Dungen**. The people in the village adopted that name, and having a strong accent, they soon called him "**Maontje**" van den Dungen. My father's first name was Cor, but in the village it was of course "**Cor from Maontje van den Dungen**". I was of course "**Herman from Cor from Maontje van den Dungen**" ..... etc. That's why I thought of **First Moon** as a brandname and that's why the logo is how it is ..... ◀

Loris Arrigucci: **PrimaLuna** ▶ believe it or not ... I discovered a small town located 50Km north of Milano called **Primaluna!!!** Please get yourself a map from Italy. You'll find **Primaluna** town near the upper-right corner. It is located 50Km north of Milano near the Lake of Como. This should eliminate every doubt regarding "italian" origin of **Primaluna** name. I've read the "history" section of the **Primaluna** village web site and found the following (literally translated):

One probable interpretation of the name of the village comes from latin "**Primum Lumen**", which means "**First Light**" of Christianity, since the very first evidence of Christianity in this region dates 495 Annus Domini. "**First Light**" translates into "**Prima Luce**" in Italian and this seems very interesting to me: **PrimaLuce (FirstLight)** is the first light that we, hi-fi lovers with small budgets, can see in this world of darkness populated by way too expensive esoteric gears ..... ◀



Please contact us for registering your PrimaLuna ProLogue Three amplifier. We will keep you updated of upgrades or any other information related to your amplifier. If you wish to comment on your PrimaLuna ProLogue Three amplifier, please do. If you want to send us a review of your experience with the amplifier, you are more than welcome to. If you have any technical questions, please don't hesitate to contact us. We thank you upfront for your time and attention.

Local distribution:

Worldwide distribution:  
Durob Audio BV  
P.O. Box 109  
5250 AC Vlijmen  
The Netherlands

Email: [primaluna@primaluna.nl](mailto:primaluna@primaluna.nl)  
Website: [www.primaluna.nl](http://www.primaluna.nl)

## PrimaLuna® ProLogue Three

### PrimaLuna®

### ProLogue Three

### Preamplifier



SerialNumber .....

## Table of Contents

Thank you	3
Specifications	4
Warning - Package Contents - Initial Setup	5
Inputs & Controls	6
PhonoLogue MM Option	7
Tube Basics	8
Fuse Protection	9
Troubleshooting	10
Warranty Information	11

## Warranty Information

Two-year limited warranty

Six-month warranty on stock vacuum tubes

## Terms & Conditions

- 1. Limited to original purchaser.** This warranty is for the sole benefit of the original purchaser of the covered product, and may not be transferred to a subsequent owner.
- 2. Conditions & Limitations.** This warranty is subject to conditions and limitations, as follows. This warranty is void and inapplicable if the product has not been used in accordance with the instructions found elsewhere in this manual, or if it has been misused, abused, damaged by accident or neglect, or in transport once in possession of purchaser. The warranty is also void if the product has been tampered with or has been repaired or modified by anyone other than Durob Audio BV or its specifically authorized representatives.
- 3. Remedy.** If this product contains material, manufacturing, or workmanship defects, it must be packed in original packaging and returned to Durob Audio BV or its authorized representative via insured freight, at the owner's expense. Returned products must be accompanied by written description of the defect, and a return authorization number (available from Durob Audio BV or the authorized representative via e-mail). Upon receipt of the defective product, Durob Audio BV or the authorized representative agrees to repair the product without charge for parts (except vacuum tubes if the unit is more than 6 months old), or labor. The product will then be returned via prepaid, insured freight, with carrier at the sole determination of Durob Audio BV or the authorized representative. This constitutes the purchaser's sole remedy.
- 4. Design change.** Durob Audio BV and its partners reserve the right to modify their products or change specifications at any time without obligation or liability to previous purchasers.
- 5. Miscellaneous.** Any implied warranties relating to the above product shall be limited to duration of this warranty. This warranty does not extend to any incidental or consequential costs or damages to purchaser or third-parties. Our liability will be no more than the amount you paid for the product that is the subject of a claim. This is the maximum amount for which we are responsible. This warranty gives you specific legal rights. You may also have other rights which vary from country to country and state to state.

Copyright Durob Audio BV - 2010. All rights reserved.

Reproduction in whole or part of text, logo, graphics or schematics is strictly forbidden without permission, in writing, of Durob Audio BV

The information in this manual is subject to change without further notice.

## Troubleshooting

Some tips:

- No output. Power is on, but power LED is off and tubes do not light up.  
Mains fuse is out. Replace fuse as per instructions on page 9.

- No output. Power LED is on and tubes do light up normally.  
Check if preamp comes out of MUTE after 30 seconds.

Check input selector setting, input and output wiring; if all seems to be OK check power amplifier.

- Noise coming from one channel.  
Noisy tube. First swap the 12AX7 tubes left to right. If noise follows tube swap, then you have found the problem tube. If noise does not follow, swap the 12AU7 tubes left to right.
- Hum coming from one channel.  
Check rectifier tube 5AR4: swap L to R, if hum follows tube then replace faulty tube.
- Noise/distortion coming from both channels.  
Tubes may be in need of replacement. Read page 8 for tube basics and replacement options.

If you try these possible solutions and problems persist, contact us or your local distributor for further investigation.

## Tube Selection

While matched tubes are not a requirement, it is still recommended if you want to get the very best results. You can get the very best in replacement tubes as well as rare vintage NOS (New Old Stock) tubes from us and other parties if you wish to upgrade. In the USA, Upscale Audio's inventory of New Old Stock tubes is the largest you can find. Elsewhere, independent suppliers can assist you to make your best choice.

THANK YOU!

We would like to thank you for choosing our PrimaLuna ProLogue Three vacuum tube preamplifier as an important part of your music system. The ProLogue Three is the third member of a new family of affordable, high-quality tube products. The designers and builders of the PrimaLuna equipment all have a long history in high-end audio. We feel that it is time to offer a range of affordable audio instruments that can easily compete with today's most expensive brands.

We firmly believe that our quality level will be a difficult standard for other products in the market to match.

This PrimaLuna ProLogue preamplifier features:

- Hand-made construction with the finest point-to-point wiring, using workmanship that is equal to or better than any product you can buy at any price.
- A heavy gauge steel, fully vented chassis with a five coat finish. Each coat is hand-rubbed and polished.
- Premium parts: separate toroidal transformers for left and right channel powersupply; ceramic tube sockets; ALPS volume control; Nichicon, Solen and Swellong capacitors; gold-plated panel mounted input and output jacks.
- SoftStart™ circuit for extended life of sensitive components, plus a reduced chance of tube failure from thermal shock.

Premium tubes are available from us and other parties if you wish to upgrade. In the USA, Upscale Audio's inventory of New Old Stock tubes is the largest you can find. Elsewhere, independent suppliers can assist you to make your best choice.

We hope that the PrimaLuna ProLogue Three preamplifier will make you want to follow our next steps in expanding this new range of products. If you have any questions or comments, don't hesitate to contact us. You can also share your thoughts with others at [www.audioreview.com](http://www.audioreview.com) or other review-sites. On the [www.primaluna.nl](http://www.primaluna.nl) website you will find links to these and other websites. Our prices are kept low by using word-of-mouth and customer feedback, and we would appreciate hearing what you have to say about our product. If you need service during or after the warranty period, contact us.

Thanks again for your support!

*Herman van den Dungen  
DUROB AUDIO BV*

# PrimaLuna® ProLogueThree

## Specifications

Gain .....	12dB (4x)
Frequency Response .....	4Hz - 110kHz +/- 3dB
THD .....	<0,2% at 775mVrms output
S/N Ratio .....	>93dB(A) ref 775mV
Input Impedance .....	100 kOhm
Input Sensitivity .....	150mV for full output power when coupled to ProLogue Four or Five
Output Impedance .....	2800 Ohm
Power Consumption .....	46W
Net Weight .....	23.5 lbs / 10.6 kg
Shipping Weight .....	27.9 lbs / 12.7 kg
Dimensions .....	15.5" x 11" x 7.5" / 395 mm x 280 mm x 190 mm (L x W x H)
Shipping Dimensions .....	18.3" x 15" x 12" / 465 mm x 380 mm x 305 mm (L x W x H)
Inputs .....	4 pairs RCA
Outputs .....	2 pairs RCA (main); 1 pair RCA (tape)
Tube Complement .....	2 x 5AR4 2 x 12AX7 2 x 12AU7

*All PrimaLuna products come with PrimaLuna SilverLabel tubes which are pre-selected by us following our simple 60 out of 100 rule (PTS™ - Premium Tube Selection) and as such, are already "special" when compared to other standard tubes on the market. Additionally, for certain models we have our GoldLabel tubes, which are available from us if you wish to upgrade.*

# PrimaLuna® ProLogueThree

## Fuse Protection

**A note on fuses:** If "someone who knows" tells you to wrap fuses with aluminium foil to avoid wasting money on new ones, it's best not to take his advice. Fuses are safety valves. They should always be replaced with the exact same value and type.

**Warning:** Never attempt to check or replace a fuse while the preamplifier is plugged in. Turn off the power amp first and after that the preamplifier. Unplug all speakers, components and AC cords before continuing. Wait 10 minutes to let tubes cool down and the circuit to fully discharge.



### Mains Fuse:

The mains fuse is located on the rear of the amplifier, just below the power cord socket (see picture on this page). **The fuse rating is 1 x Littelfuse® 213 Series 1A Slo-Blo® 5 x 20 mm fuse for 100-120VAC and Littelfuse® 213 Series 0.5AA Slo-Blo® 5 x 20 mm fuse for 200-240VAC.** Replace with the same type and value fuse! The fuse holder can be snapped out using a small slotted flat blade screwdriver.

As of July 1, 2006 all PrimaLuna products are manufactured with RoHS compliant parts.

# PrimaLuna® ProLogue Three

## Tube Basics

The 12AX7, 12AU7 and 5AR4 tubes will have a life of about 10,000 hours.

Here are some tips on using tubes:


- Do not use treatments on tube pins or in sockets.
- If you decide to experiment with other tube types, it's best not to swap tubes in and out repeatedly, as you never want to cycle (pre)amplifiers on and off rapidly. They should be left off for at least five minutes. Further, every time you insert a tube, you stand a chance of loosening the tube sockets. It's okay to have fun, and we support that, but don't go crazy and swap tubes in and out twenty times in a day.
- The ProLogue Three has a warm-up time of just a few minutes. While it is not wise to leave tube power amplifiers on 24 hours a day, you may leave this preamplifier on though it will result in more frequent tube replacement. Through experimentation come to a conclusion that fits comfortably with your lifestyle.
- Break-in yields improvements. Every tube, when new, needs to be left alone for a little while. So, when your preamplifier is new, or when you re-tube it, it may take a little time to settle in. There is however no fixed "time rule" for break-in.
- Please note that tubes can vary electrically, and by plugging in the wrong type of tube (i.e. 6922 for a 12AX7) you can damage the preamplifier, and void your warranty.

## Common replacements:

- **12AX7:** ECC83, ECC803S, E83CC, 7025, CV4004. You can also use a 5751, but please note that the 5751 is a lower gain tube than a 12AX7 and the sound will be altered.
- **12AU7:** ECC82, ECC802S, E82CC, 5814, 6189, CV4003
- **5AR4:** GZ34, CV1377 are equivalent. 5V4G, 5T4, and 5Y3 will also function fine with small sonic changes that you may want to experiment with. Do not use other types as damage may occur



Topview picture of ProLogue Three



*Some tubes and tube sockets have a "center key" which must correspond! If you use "brute" force and misalign, you will damage important and expensive parts of your amplifier!!*

# PrimaLuna® ProLogue Three

## Warning

To prevent serious injury, electrical shock or fire:

- Do not operate with bottom plate removed.
- Keep away from rain and moisture.
- Always disconnect all cable connections to and from preamplifier before changing fuses and/or tubes.
- Do not replace fuses with any fuse other than the same type and rating as used by the factory.
- Do not replace tubes without reading instructions.
- Do not replace fuses or tubes if you have any doubt about your ability to do so. We accept no responsibility for any personal or material damage due to incompetent use or users.

## Package Contents

ProLogue Three Preamplifier .....	1
Power Cord .....	1
This Owner's Manual .....	1
White Gloves .....	1 pair
Tube Complement .....	2 x 5AR4 2 x 12AX7 2 x 12AU7
Main Fuse .....	1 x Littelfuse® 213 Series 1A Slo-Blo® 5 x 20 mm fuse for 100-120VAC and Littelfuse® 213 Series 0.5A Slo-Blo® 5 x 20 mm fuse for 200-240VAC


## Initial Setup

- Carefully remove the ProLogue Three from its packaging. Use the white gloves to prevent fingerprint smudges.
- Remove the tube cage by carefully pulling it up and away from the preamplifier.
- Remove the protective foam surrounding the tubes.
- Tubes are already installed. Check that each tube is firmly seated in its socket. Use gloves.
- Replace cage back in its place if desired.
- Check to see the power switch is off (down).
- Connect each source to the corresponding plugs.
- Connect output of preamp with input of poweramp.
- Connect your speaker wires, positive to positive, negative to negative, to your power amp.
- Plug the powercords into the preamplifier and amplifier, then into the wall sockets.
- Switch the preamplifier on; the main outputs will be muted for 30 seconds while the tubes warm up.
- Switch the poweramplifier on when the mute of the preamp is released.
- The tubes will be warmed up and ready to use in about 30 seconds. Other parts (capacitors) will need more time to sound at their best, specially the first time you use the preamplifier.

# PrimaLuna® ProLogue Three


## Inputs and Controls

### Front Panel

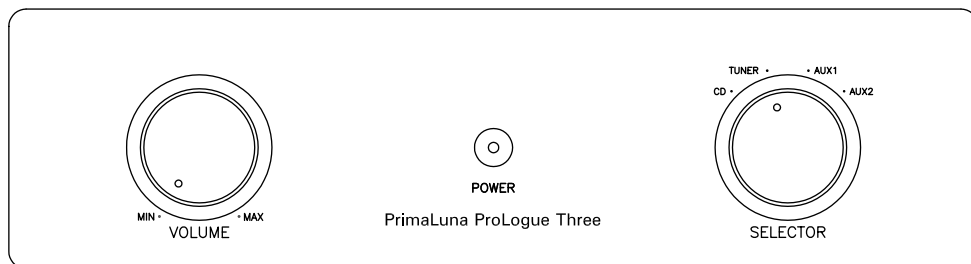

The front panel of the PrimaLuna models is made from machined aluminium, finished to match the blue metallic chassis. The volume is controlled with the knob on the left, source selection is on the right. Your sources are labelled CD, Tuner, Aux 1 and Aux 2, but all are interchangeable. There is no functional difference between the inputs. The power switch is located on the left side of the amp, just behind the front plate.

### Rear Panel

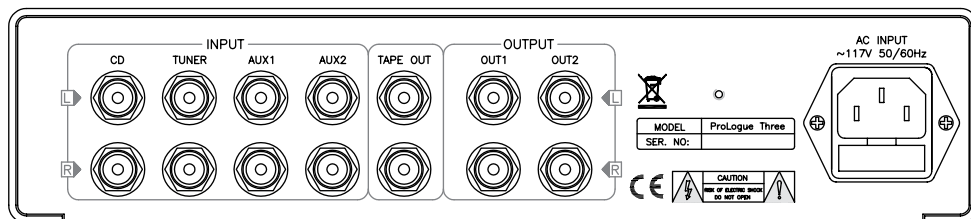


Looking at the rear panel, you'll note you have four sets of inputs, 1 set of tape outputs, 2 sets of preamp outputs.

# PrimaLuna® ProLogue Three

## PhonoLogue Phono Stage (Optional)

Your ProLogue Three preamplifier comes without a phono stage, but we have a high quality optional internal phono stage available. The PhonoLogue phono stage can be installed at any time by your dealer or any qualified person.

The PhonoLogue MM phono stage with RIAA equalization, requires no extra plugs or connectors. It fits (by soldering) on the existing RCA's of one of the inputs. It provides superior sound quality on a tiny footprint. We use Surface Mount Technology implementation for shortest signal paths as well as minimum parasitic capacitances and inductances. Excellent parts throughout, selected on sound quality as first priority: miniature film capacitors, minifilm resistors, superior opamp for highest accuracy, lowest noise, highest speed and most robust drive capabilities into the RIAA correction stage, resulting in a very detailed, open and lifelike sound from any LP record. Low impedance electrolytics, super low-noise powersupply. Dimensions: small as a big stamp!

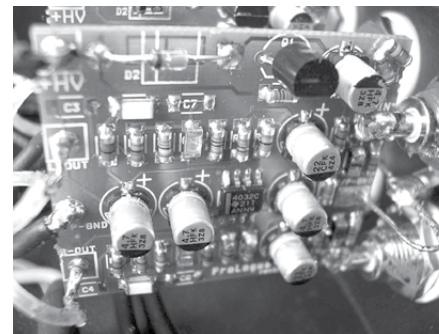

## Specifications:

Input Impedance:	50 kOhm
Gain:	42dB (127x)
Frequency Response:	10Hz - 50kHz
RIAA accuracy:	<0,5B 20Hz - 20kHz
Overload Margin:	>20dB rel 5mV
Harmonic Distortion & noise:	-83dB
Size:	3,2 x 3,8 cm (1.26" x 1.5")